

## TOP-341A SERIES P.C.B POSITIONING GUIDE

ONE-TOUCH SIMPLE SOLDERING POSITION.

PB  
FREE

NEW




### TOP-341A SERIES FEATURE

- Easy setting of P.C.B soldering position (X.Y)
- Used together with point soldering machine.
- Response to big size P.C.B (250×350mm), M size.
- Slow-up function prevent icicle,bridging (with TOP-341A)
- Not necessary for customized tools.
- Quality and productivity for soldering is up.

# CELL PRODUCTION SYSTEM

## TOP.341 A.342.343 GOOD EFFICIENT FUNCTION

- ① Setting GUIDE on P.C.B (X.Y positioning).  
Then start switch "ON" and automatic operation safe.

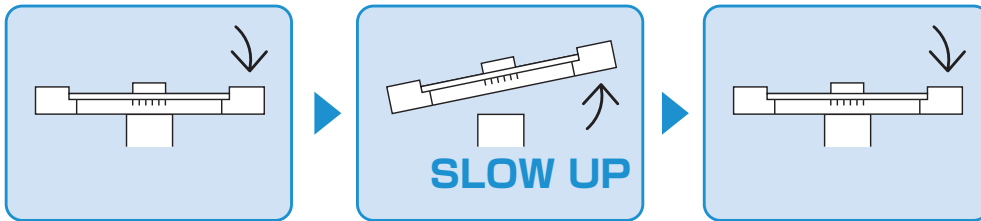

- ② Soldering position is variable in X-Y direction.  
③ Flow timer and up-speed are adjustable.  
④ Original slow-up function for prevent icicle, bridging.  
⑤ Easy setting up for unit type.  
⑥ Appoint point solder series.

SPECIFICATION			
Model	TOP-341A	TOP-342	TOP-343
	Controller	P.C.B guide	P.C.B guide mini
Point solder	All soldering machine	TOP-375	TOP-323A/333A
Power	AC100V(115/230spec) 50/60Hz	—	—
Rating	55W	—	—
Maximum P.C.B size	—	250×350mm	
Positioning	—	XY Positioning	
Movable size	Up stroke 50mm	X=300 Y=500	X=300 Y=400
UP/DOWN	Linear head motor	—	—
Outside dimension	130W×400D×175H	380W×570D×30H	380W×495D×30H
Weight	6.5kg	1.5kg	1.5kg

TOP-341A



TOP-342.343

